


Adafruit Feather M0 Express - Designed for CircuitPython

Created by lady_ada

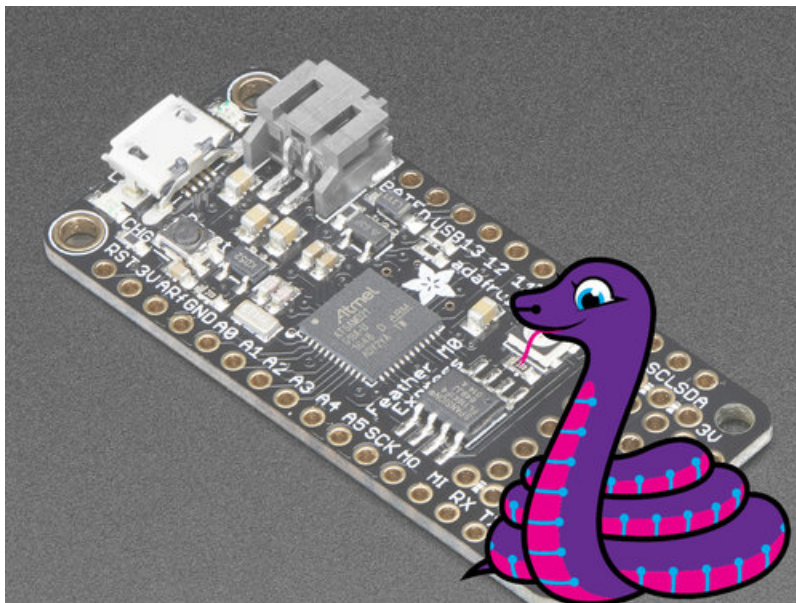

Last updated on 2021-06-07 11:33:08 AM EDT

Guide Contents

Guide Contents	2
Overview	9
Pinouts	12
Power Pins	12
Logic pins	13
SPI Flash and NeoPixel	14
Other Pins!	15
Debug Interface	15
Assembly	17
Header Options!	17
Soldering in Plain Headers	20
Prepare the header strip:	20
Add the breakout board:	21
And Solder!	21
Soldering on Female Header	23
Tape In Place	23
Flip & Tack Solder	24
And Solder!	25
Power Management	27
Battery + USB Power	27
Power supplies	28
Measuring Battery	28
ENable pin	30
Alternative Power Options	30
Arduino IDE Setup	32
https://adafruit.github.io/arduino-board-index/package_adafruit_index.json	33
Using with Arduino IDE	35
Install SAMD Support	35
Install Adafruit SAMD	36
Install Drivers (Windows 7 & 8 Only)	37
Blink	39
Successful Upload	40
Compilation Issues	41
Manually bootloading	41
Ubuntu & Linux Issue Fix	42
Adapting Sketches to M0 & M4	43
Analog References	43
Pin Outputs & Pullups	43
Serial vs SerialUSB	43
AnalogWrite / PWM on Feather/Metro M0	44
analogWrite() PWM range	45
analogWrite() DAC on A0	45
Missing header files	45
Bootloader Launching	46
Aligned Memory Access	46

Floating Point Conversion	46
How Much RAM Available?	47
Storing data in FLASH	47
Pretty-Printing out registers	47
M4 Performance Options	48
CPU Speed (overclocking)	48
Optimize	49
Cache	49
Max SPI and Max QSPI	49
Enabling the Buck Converter on some M4 Boards	50
Using SPI Flash	51
Read & Write CircuitPython Files	52
Format Flash Memory	54
Datalogging Example	55
Reading and Printing Files	55
Full Usage Example	56
Accessing SPI Flash	56
Feather HELP!	58
My ItsyBitsy/Feather stopped working when I unplugged the USB!	58
My Feather never shows up as a COM or Serial port in the Arduino IDE	59
Ack! I "did something" and now when I plug in the Itsy/Feather, it doesn't show up as a device anymore so I cant upload to it or fix it...	60
I can't get the Itsy/Feather USB device to show up - I get "USB Device Malfunctioning" errors!	61
I'm having problems with COM ports and my Itsy/Feather 32u4/M0	62
I don't understand why the COM port disappears, this does not happen on my Arduino UNO!	63
I'm trying to upload to my 32u4, getting "avrdude: butterfly_recv(): programmer is not responding" errors	64
I'm trying to upload to my Feather M0, and I get this error "Connecting to programmer: .avrdude: butterfly_recv(): programmer is not responding"	66
I'm trying to upload to my Feather and i get this error "avrdude: ser_recv(): programmer is not responding"	67
I attached some wings to my Feather and now I can't read the battery voltage!	68
The yellow LED Is flickering on my Feather, but no battery is plugged in, why is that?	69
What is CircuitPython?	71
CircuitPython is based on Python	71
Why would I use CircuitPython?	71
CircuitPython	73
Set up CircuitPython Quick Start!	73
Further Information	75
Installing Mu Editor	76
Download and Install Mu	76
Using Mu	76
Creating and Editing Code	78
Creating Code	78
Editing Code	80
Your code changes are run as soon as the file is done saving.	81
1. Use an editor that writes out the file completely when you save it.	81
2. Eject or Sync the Drive After Writing	82
Oh No I Did Something Wrong and Now The CIRCUITPY Drive Doesn't Show Up!!!	82
Back to Editing Code...	83
Exploring Your First CircuitPython Program	84
Imports & Libraries	84
Setting Up The LED	84

Loop-de-loops	85
What Happens When My Code Finishes Running?	85
What if I don't have the loop?	86
More Changes	87
Naming Your Program File	87
Connecting to the Serial Console	88
Are you using Mu?	88
Setting Permissions on Linux	89
Using Something Else?	90
Interacting with the Serial Console	91
The REPL	95
Returning to the serial console	99
CircuitPython Libraries	100
Installing the CircuitPython Library Bundle	101
Example Files	102
Copying Libraries to Your Board	103
Example: ImportError Due to Missing Library	103
Library Install on Non-Express Boards	104
Updating CircuitPython Libraries/Examples	105
Frequently Asked Questions	106
I have to continue using an older version of CircuitPython; where can I find compatible libraries?	106
Is ESP8266 or ESP32 supported in CircuitPython? Why not?	106
How do I connect to the Internet with CircuitPython?	107
Is there asyncio support in CircuitPython?	108
My RGB NeoPixel/DotStar LED is blinking funny colors - what does it mean?	109
What is a MemoryError?	110
What do I do when I encounter a MemoryError?	110
Can the order of my import statements affect memory?	111
How can I create my own .mpy files?	111
How do I check how much memory I have free?	111
Does CircuitPython support interrupts?	111
Does Feather M0 support WINC1500?	112
Can AVRs such as ATmega328 or ATmega2560 run CircuitPython?	112
Commonly Used Acronyms	112
Troubleshooting	113
Always Run the Latest Version of CircuitPython and Libraries	113
I have to continue using CircuitPython 5.x, 4.x, 3.x or 2.x, where can I find compatible libraries?	113
CPLAYBOOT, TRINKETBOOT, FEATHERBOOT, or GEMMABOOT Drive Not Present	113
You may have a different board.	114
MakeCode	114
MacOS	114
Windows 10	114
Windows 7 or 8.1	114
Windows Explorer Locks Up When Accessing boardnameBOOT Drive	115
Copying UF2 to boardnameBOOT Drive Hangs at 0% Copied	116
CIRCUITPY Drive Does Not Appear	116
Windows 7 and 8.1 Problems	116
Serial Console in Mu Not Displaying Anything	116
CircuitPython RGB Status Light	117

ValueError: Incompatible .mpy file.	118
CIRCUITPY Drive Issues	118
Easiest Way: Use <code>storage.erase_filesystem()</code>	119
Old Way: For the Circuit Playground Express, Feather M0 Express, and Metro M0 Express:	119
Old Way: For Non-Express Boards with a UF2 bootloader (Gemma M0, Trinket M0):	121
Old Way: For non-Express Boards without a UF2 bootloader (Feather M0 Basic Proto, Feather Adalogger, Arduino Zero):	121
Running Out of File Space on Non-Express Boards	121
Delete something!	121
Use tabs	122
MacOS loves to add extra files.	122
Prevent & Remove MacOS Hidden Files	122
Copy Files on MacOS Without Creating Hidden Files	123
Other MacOS Space-Saving Tips	124
Device locked up or boot looping	125
Uninstalling CircuitPython	126
Backup Your Code	126
Moving Circuit Playground Express to MakeCode	126
Moving to Arduino	127
Welcome to the Community!	130
Adafruit Discord	130
Adafruit Forums	131
Adafruit Github	132
ReadTheDocs	133
CircuitPython Essentials	135
CircuitPython Pins and Modules	136
CircuitPython Pins	136
import board	136
I2C, SPI, and UART	137
What Are All the Available Names?	138
Microcontroller Pin Names	139
CircuitPython Built-In Modules	140
CircuitPython Built-Ins	141
Thing That Are Built In and Work	141
Flow Control	141
Math	141
Tuples, Lists, Arrays, and Dictionaries	141
Classes, Objects and Functions	141
Lambdas	141
Random Numbers	142
CircuitPython Digital In & Out	143
Find the pins!	144
Read the Docs	146
CircuitPython Analog In	147
Creating the analog input	147
get_voltage Helper	147
Main Loop	147
Changing It Up	148
Wire it up	148
Reading Analog Pin Values	151
CircuitPython Analog Out	152
Creating an analog output	152

Setting the analog output	152
Main Loop	152
Find the pin	153
CircuitPython PWM	157
PWM with Fixed Frequency	157
Create a PWM Output	158
Main Loop	158
PWM Output with Variable Frequency	159
Wire it up	160
Where's My PWM?	164
CircuitPython Servo	166
Servo Wiring	166
Standard Servo Code	169
Continuous Servo Code	169
CircuitPython Cap Touch	171
Create the Touch Input	171
Main Loop	171
Find the Pin(s)	172
CircuitPython Internal RGB LED	176
Create the LED	177
Brightness	177
Main Loop	177
Making Rainbows (Because Who Doesn't Love 'Em!)	178
Circuit Playground Express Rainbow	180
CircuitPython NeoPixel	181
Wiring It Up	181
The Code	182
Create the LED	184
NeoPixel Helpers	184
Main Loop	184
NeoPixel RGBW	185
Read the Docs	186
CircuitPython DotStar	187
Wire It Up	187
The Code	188
Create the LED	191
DotStar Helpers	191
Main Loop	192
Is it SPI?	192
Read the Docs	193
CircuitPython UART Serial	194
The Code	195
Wire It Up	196
Where's my UART?	199
Trinket M0: Create UART before I2C	200
CircuitPython I2C	202
Wire It Up	202
Find Your Sensor	205
I2C Sensor Data	206
Where's my I2C?	207
CircuitPython HID Keyboard and Mouse	209
CircuitPython Keyboard Emulator	209
Create the Objects and Variables	211
The Main Loop	211

CircuitPython Mouse Emulator	212
Create the Objects and Variables	214
CircuitPython HID Mouse Helpers	214
Main Loop	215
CircuitPython CPU Temp	216
CircuitPython Storage	217
Logging the Temperature	219
CircuitPython Expectations	222
Always Run the Latest Version of CircuitPython and Libraries	222
I have to continue using CircuitPython 3.x or 2.x, where can I find compatible libraries?	222
Switching Between CircuitPython and Arduino	222
The Difference Between Express And Non-Express Boards	223
Non-Express Boards: Gemma, Trinket, and QT Py	223
Small Disk Space	223
No Audio or NVM	223
Differences Between CircuitPython and MicroPython	223
Differences Between CircuitPython and Python	224
Python Libraries	224
Integers in CircuitPython	224
Floating Point Numbers and Digits of Precision for Floats in CircuitPython	224
Differences between MicroPython and Python	224
MakeCode	225
What is MakeCode Maker?	226
How is it related to makecode.adafruit.com ?	226
Is it open source?	227
Editing Blocks	230
Blinky!	230
Editing JavaScript	232
Blocks to JavaScript	232
Downloading and Flashing	233
Step 1: Connect your board via USB	233
Step 2: Test your code in the simulator	233
Step 3: Download and flash your code	234
General Steps to copy over your program (not specific to any Operating system)	234
Saving and Sharing	235
Extracting your code from the board	235
Sharing	235
Custom Extensions	236
Account setup	236
Commit and push	237
Conflicts	238
Testing your package	239
UF2 Bootloader Details	241
Entering Bootloader Mode	242
Using the Mass Storage Bootloader	244
Using the BOSSA Bootloader	245
Windows 7 Drivers	245
Verifying Serial Port in Device Manager	246
Running bossac on the command line	248
Using bossac Versions 1.7.0, 1.8	248
Using bossac Versions 1.9 or Later	248

Updating the bootloader	249
Getting Rid of Windows Pop-ups	250
Making your own UF2	251
Installing the bootloader on a fresh/bricked board	252
Downloads	253
Datasheets	253
Firmware	253
Schematic & Fabrication Print	253

