


Introducing Adafruit ItsyBitsy M4

Created by lady ada

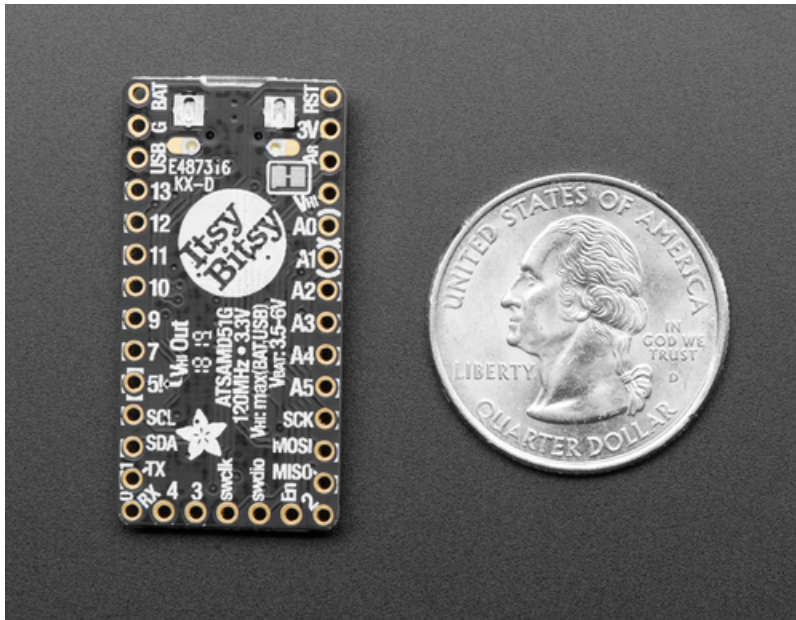

Last updated on 2021-10-16 03:45:01 PM EDT

Guide Contents

Guide Contents	2
Overview	8
Update the UF2 Bootloader	11
Updating Your Bootloader	11
Pinouts	15
Power Pins	15
Logic pins	16
Along the right edge	17
Along the left edge	18
Along the short edge:	19
Parallel Capture Peripheral	19
QSPI Flash and DotStar	20
Other Pins	20
Arduino IDE Setup	22
https://adafruit.github.io/arduino-board-index/package_adafruit_index.json	23
Using with Arduino IDE	25
Install SAMD Support	25
Install Adafruit SAMD	26
Install Drivers (Windows 7 & 8 Only)	27
Blink	29
Successful Upload	30
Compilation Issues	31
Manually bootloading	31
Ubuntu & Linux Issue Fix	32
Adapting Sketches to M0 & M4	33
Analog References	33
Pin Outputs & Pullups	33
Serial vs SerialUSB	33
AnalogWrite / PWM on Feather/Metro M0	34
analogWrite() PWM range	35
analogWrite() DAC on A0	35
Missing header files	35
Bootloader Launching	36
Aligned Memory Access	36
Floating Point Conversion	36
How Much RAM Available?	37
Storing data in FLASH	37
Pretty-Printing out registers	37
M4 Performance Options	38
CPU Speed (overclocking)	38
Optimize	39
Cache	39
Max SPI and Max QSPI	39
Enabling the Buck Converter on some M4 Boards	40
What is CircuitPython?	41

CircuitPython is based on Python	41
Why would I use CircuitPython?	41
CircuitPython on ItsyBitsy	43
Set up CircuitPython Quick Start!	43
Further Information	43
Installing the Mu Editor	45
Download and Install Mu	45
Using Mu	45
Creating and Editing Code	47
Creating Code	47
Editing Code	49
Your code changes are run as soon as the file is done saving.	49
1. Use an editor that writes out the file completely when you save it.	49
2. Eject or Sync the Drive After Writing	50
Oh No I Did Something Wrong and Now The CIRCUITPY Drive Doesn't Show Up!!!	51
Back to Editing Code...	52
Exploring Your First CircuitPython Program	52
Imports & Libraries	52
Setting Up The LED	53
Loop-de-loops	53
What Happens When My Code Finishes Running?	54
What if I don't have the loop?	54
More Changes	55
Naming Your Program File	56
Connecting to the Serial Console	57
Are you using Mu?	57
Setting Permissions on Linux	58
Using Something Else?	59
Interacting with the Serial Console	60
The REPL	64
Returning to the serial console	67
CircuitPython Libraries	68
Installing the CircuitPython Library Bundle	69
Example Files	70
Copying Libraries to Your Board	71
Example: ImportError Due to Missing Library	71
Library Install on Non-Express Boards	72
Updating CircuitPython Libraries/Examples	73
Frequently Asked Questions	74
I have to continue using an older version of CircuitPython; where can I find compatible libraries?	74
Is ESP8266 or ESP32 supported in CircuitPython? Why not?	74
How do I connect to the Internet with CircuitPython?	75
Is there asyncio support in CircuitPython?	76
My RGB NeoPixel/DotStar LED is blinking funny colors - what does it mean?	77
What is a MemoryError?	78
What do I do when I encounter a MemoryError?	78
Can the order of my import statements affect memory?	79
How can I create my own .mpy files?	79
How do I check how much memory I have free?	79
Does CircuitPython support interrupts?	79
Does Feather M0 support WINC1500?	80
Can AVR's such as ATmega328 or ATmega2560 run CircuitPython?	80

Commonly Used Acronyms	80
Welcome to the Community!	81
Adafruit Discord	81
Adafruit Forums	82
Adafruit Github	83
ReadTheDocs	84
Advanced Serial Console on Windows	86
Windows 7 Driver	86
What's the COM?	86
Install Putty	88
Advanced Serial Console on Mac and Linux	90
What's the Port?	90
Connect with screen	92
Permissions on Linux	93
"Uninstalling" CircuitPython	96
Backup Your Code	96
Moving Circuit Playground Express to MakeCode	96
Moving to Arduino	97
Troubleshooting	100
Always Run the Latest Version of CircuitPython and Libraries	100
I have to continue using CircuitPython 5.x or earlier. Where can I find compatible libraries?	
CPLAYBOOT, TRINKETBOOT, FEATHERBOOT, or GEMMABOOT Drive Not Present	100
You may have a different board.	101
MakeCode	101
MacOS	101
Windows 10	101
Windows 7 or 8.1	101
Windows Explorer Locks Up When Accessing boardnameBOOT Drive	102
Copying UF2 to boardnameBOOT Drive Hangs at 0% Copied	103
CIRCUITPY Drive Does Not Appear	103
Device Errors or Problems on Windows	103
Serial Console in Mu Not Displaying Anything	104
CircuitPython RGB Status Light	105
CircuitPython 7.0.0 and Later	105
CircuitPython 6.3.0 and earlier	106
ValueError: Incompatible .mpy file.	106
CIRCUITPY Drive Issues	106
Easiest Way: Use storage.erase_filesystem()	107
Old Way: For the Circuit Playground Express, Feather M0 Express, and Metro M0 Express:	107
Old Way: For Non-Express Boards with a UF2 bootloader (Gemma M0, Trinket M0):	109
Old Way: For non-Express Boards without a UF2 bootloader (Feather M0 Basic Proto, Feather Adalogger, Arduino Zero):	109
Running Out of File Space on Non-Express Boards	110
Delete something!	110
Use tabs	110
MacOS loves to add extra files.	110
Prevent & Remove MacOS Hidden Files	110
Copy Files on MacOS Without Creating Hidden Files	111
Other MacOS Space-Saving Tips	112
Device Locked Up or Boot Looping	113

CircuitPython Essentials	115
CircuitPython Pins and Modules	116
CircuitPython Pins	116
import board	116
I2C, SPI, and UART	117
What Are All the Available Names?	118
Microcontroller Pin Names	119
CircuitPython Built-In Modules	120
CircuitPython Built-Ins	121
Thing That Are Built In and Work	121
Flow Control	121
Math	121
Tuples, Lists, Arrays, and Dictionaries	121
Classes, Objects and Functions	121
Lambdas	121
Random Numbers	122
CircuitPython Digital In & Out	123
Find the pins!	124
Read the Docs	126
CircuitPython Analog In	127
Creating the analog input	127
get_voltage Helper	127
Main Loop	127
Changing It Up	128
Wire it up	128
Reading Analog Pin Values	131
CircuitPython Analog Out	132
Creating an analog output	132
Setting the analog output	132
Main Loop	132
Find the pin	133
CircuitPython PWM	137
PWM with Fixed Frequency	137
Create a PWM Output	138
Main Loop	138
PWM Output with Variable Frequency	139
Wire it up	140
Where's My PWM?	144
CircuitPython Servo	146
Servo Wiring	146
Standard Servo Code	149
Continuous Servo Code	149
CircuitPython Internal RGB LED	151
Create the LED	152
Brightness	152
Main Loop	152
Making Rainbows (Because Who Doesn't Love 'Em!)	153
Circuit Playground Express Rainbow	154
CircuitPython NeoPixel	156
Wiring It Up	156
The Code	157
Create the LED	158
NeoPixel Helpers	159

Main Loop	159
NeoPixel RGBW	159
Read the Docs	161
CircuitPython DotStar	162
Wire It Up	162
The Code	163
Create the LED	165
DotStar Helpers	166
Main Loop	166
Is it SPI?	167
Read the Docs	167
CircuitPython UART Serial	169
The Code	170
Wire It Up	171
Where's my UART?	174
Trinket M0: Create UART before I2C	175
CircuitPython I2C	177
Wire It Up	177
Find Your Sensor	180
I2C Sensor Data	181
Where's my I2C?	182
CircuitPython HID Keyboard and Mouse	184
CircuitPython Keyboard Emulator	184
Create the Objects and Variables	186
The Main Loop	186
Non-US Keyboard Layouts	186
CircuitPython Mouse Emulator	187
Create the Objects and Variables	189
CircuitPython HID Mouse Helpers	189
Main Loop	190
CircuitPython Storage	191
Logging the Temperature	193
CircuitPython CPU Temp	196
CircuitPython Expectations	197
Always Run the Latest Version of CircuitPython and Libraries	197
I have to continue using CircuitPython 3.x or 2.x, where can I find compatible libraries?	197
Switching Between CircuitPython and Arduino	197
The Difference Between Express And Non-Express Boards	198
Non-Express Boards: Gemma, Trinket, and QT Py	198
Small Disk Space	198
No Audio or NVM	198
Differences Between CircuitPython and MicroPython	198
Differences Between CircuitPython and Python	199
Python Libraries	199
Integers in CircuitPython	199
Floating Point Numbers and Digits of Precision for Floats in CircuitPython	199
Differences between MicroPython and Python	199
UF2 Bootloader Details	200
Entering Bootloader Mode	201
Using the Mass Storage Bootloader	203
Using the BOSSA Bootloader	204

Windows 7 Drivers	204
Verifying Serial Port in Device Manager	205
Running bossac on the command line	207
Using bossac Versions 1.7.0, 1.8	207
Using bossac Versions 1.9 or Later	207
Updating the bootloader	208
Getting Rid of Windows Pop-ups	209
Making your own UF2	210
Installing the bootloader on a fresh/bricked board	211
Downloads	212
Files	212
Schematic & Fabrication Print	212

