



# Mount for CRICKIT

Created by Ruiz Brothers



<https://learn.adafruit.com/mount-for-crickit>


Last updated on 2021-11-15 07:16:33 PM EST

# Table of Contents

<b>Overview</b>	<b>3</b>
• 3D Printed Mount for CRICKIT	3
• Additional Hardware	5
<b>3D Printing</b>	<b>6</b>
• Add-On Attachments	6
• What If I Don't Have A 3D Printer?	6
• Tripod Add-on	7
• Battery Pack Add-ons	7
• Threaded M3 Inserts	7
• LEGO Add-on	8
• Download STLs	8
• Slicing In CURA	8
• Preview Tool Paths	9
• Fusion 360 files	9
• Design Source Files	9


---

# Overview

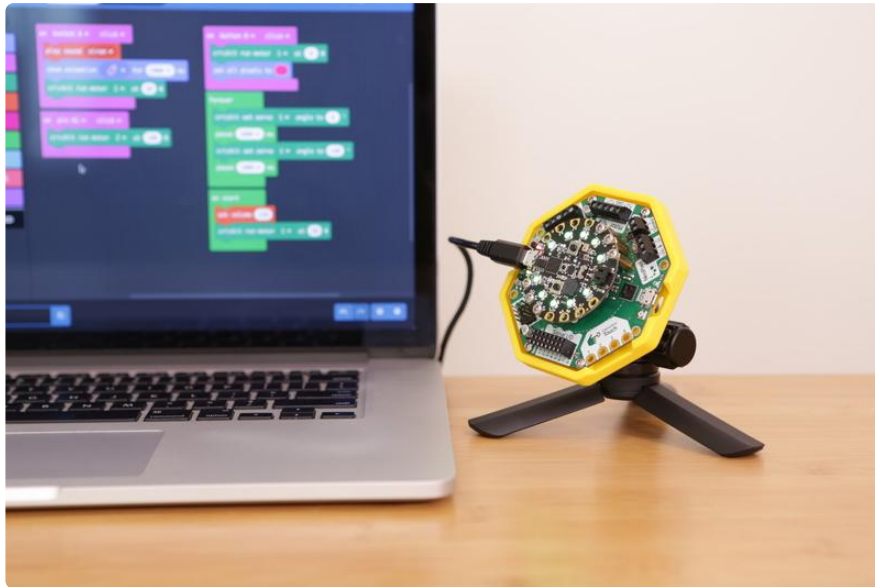

## 3D Printed Mount for CRICKIT


Do you want to secure the CRICKIT board to your project? Then this mount is for you! This 3D printed mount is a general, multi-purpose mount designed to house the CRICKIT PCB with M3 machine screws. It features slots for attaching to surfaces and things. The low-profile design has openings for all of the various ports and terminal blocks allowing room for cables and wires.

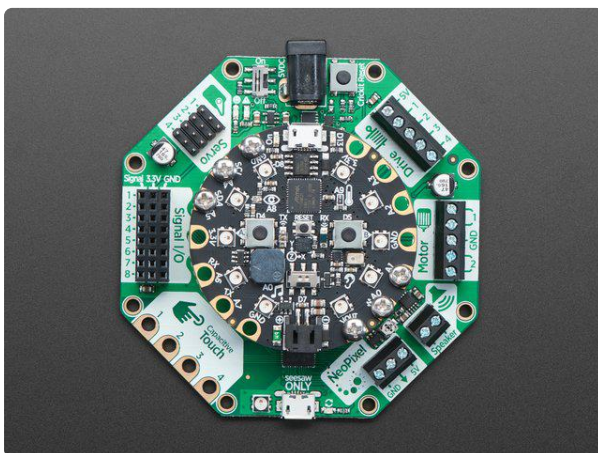

### [Adafruit CRICKIT for Circuit Playground Express](https://www.adafruit.com/product/3093)

Sometimes we wonder if robotics engineers ever watch movies. If they did, they'd know that making robots into slaves always ends up in a robot rebellion. Why even go down that...


<https://www.adafruit.com/product/3093>

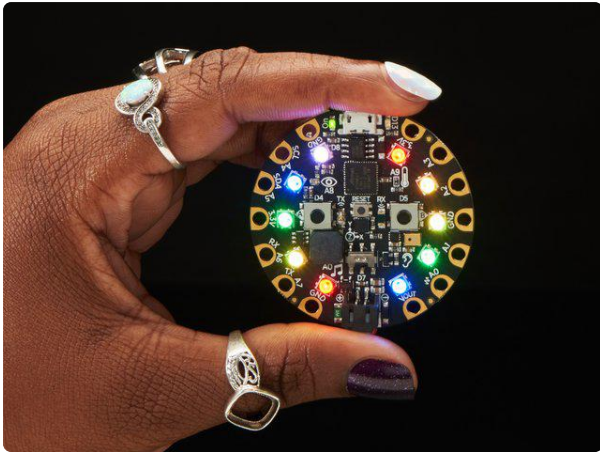

### Circuit Playground Express

Circuit Playground Express is the next step towards a perfect introduction to electronics and programming. We've taken the original Circuit Playground Classic and...


<https://www.adafruit.com/product/3333>

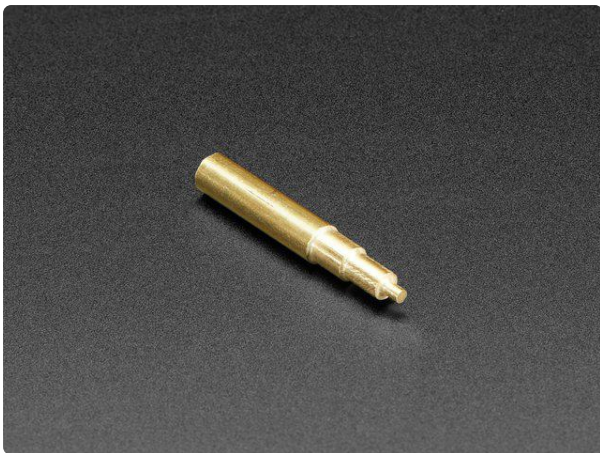

### Heat-Set Insert For Soldering Irons - #4-40 / M3 Inserts

Wanna improve the connection strength between your project's 3D-printed parts, and also have nice clean surfaces? Instead of gluing bits together, or screwing plastic screws...


<https://www.adafruit.com/product/4239>

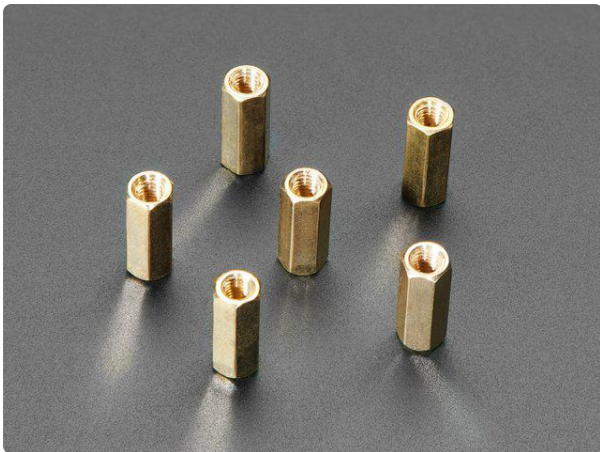

### Circuit Playground Bolt-On Kit

You have a Circuit Playground Express, but you need to mount it to your charming cardboard robot friend, eh? Not so easy if you...

<https://www.adafruit.com/product/3816>

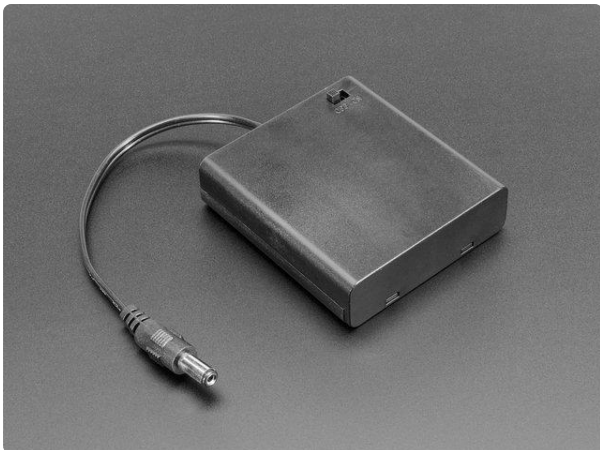

### 4 x AA Battery Holder with 2.1mm Plug and On/Off Switch

Here's another addition to our growing family of AA battery holders. Behold! A holder for four (4) AA batteries!...

<https://www.adafruit.com/product/3788>

## Additional Hardware

You'll want to get some extra screws and hex nuts for securing the PCB to the mount and attaching to other things. Here's a list of M3 metric hardware you'll need.

### 1 x [M3 x .5mm x 6mm Machine Screws](#)

Phillips Metric Pan Head Screws

<https://www.albanycountyfasteners.com/Phillips-Pan-Head-Machine-Screw-M3-x-5-p/1066-1008.htm>

### 1 x [M3 x .5mm Hex Nuts](#)

Metric Hex Jam Nuts

<https://www.albanycountyfasteners.com/Metric-Hex-Jam-Nuts-A2-Stainless-Steel-p/5580000.htm>

### 1 x [Tripod Screw Insert](#)

Camera and Tripod 3/8" to 1/4" Adapter Screw

<https://adafruit.com/products/2392>

### 1 x [M3 Threaded Inserts](#)

Brass Threaded Insert Nuts 100PCS


<http://a.co/363VPJ5>





---

# 3D Printing

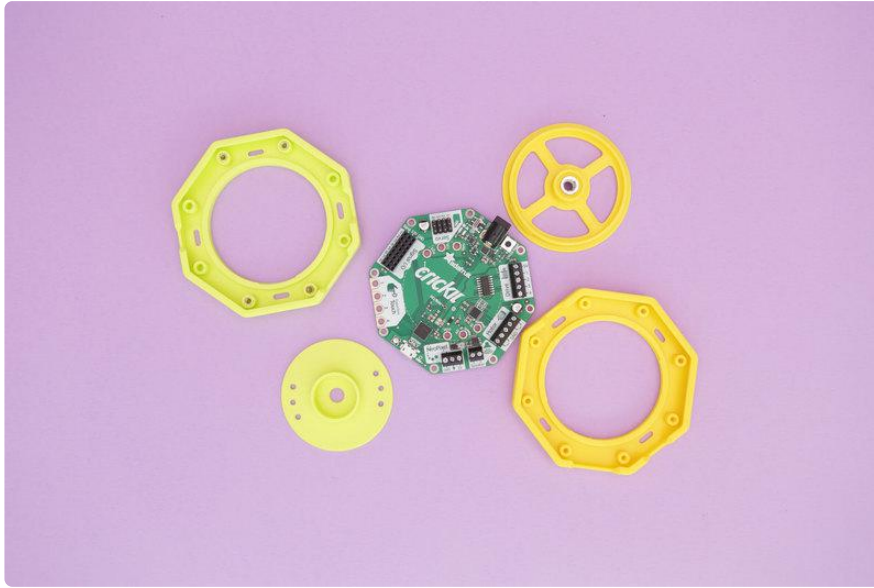


## Add-On Attachments

The mount is designed to fit various add-ons like tripods and battery packs. The center of the mount allows for these add-ons to snap fit in place. So you can swap out different add-ons without having to use additional hardware. This allows the mount to be reused. You can also design your own custom add-ons!

## What If I Don't Have A 3D Printer?

Not to worry! You can use a 3D printing service such as [3DHubs \(https://adafru.it/jNb\)](https://adafru.it/jNb) or [MakeXYZ \(https://adafru.it/veh\)](https://adafru.it/veh) to have a local 3D printer operator 3D print and ship you parts to you. This is a great way to get your parts 3D printed by local makers. You could also try checking out your local Library or search for a Maker Space.

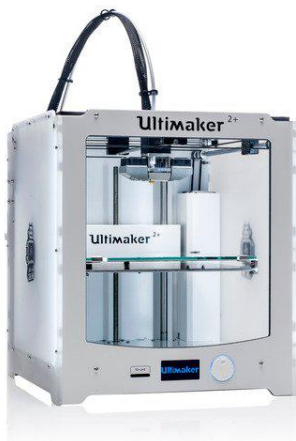

### Ultimaker 2+ 3D Printer

The Ultimaker 2+ is one of our favorite 3D printers on the market. It's a well-built open-source compact machine with an excellent UX. Every inch of the...

<https://www.adafruit.com/product/2673>



## Tripod Add-on

This add-on features a spot for a [3/8 – 1/4-20 screw adapter](https://adafru.it/toF) (<https://adafru.it/toF>) for any standard Tripod. This is a great way to mount your CRICKIT board. Tripods come in many different sizes and configurations so you can attach this to your projects in all sorts of ways.



## Battery Pack Add-ons

The battery add-on is secured to the bottom of the mount with two M2 screws and hex nuts. This is designed to hold a [3x AA battery pack](https://adafru.it/BSH) (<https://adafru.it/BSH>). You'll want to install the battery pack before securing the PCB to the mount. To power CRICKIT, you'll need at least 4-5 volts DC power via the 2.1mm jack.



## Threaded M3 Inserts

The mount features 8x built-in standoffs to elevate the CRICKIT board. These standoffs allow for threads M3 inserts for super secure fittings. You can either press fit the inserts or use the tip of a soldering iron to heat press them into the standoffs.



## LEGO Add-on

For prototyping with LEGO, we designed a special mount that allows you to snap onto standard LEGO bricks. You'll need standoffs and screws to secure the PCB. Line up the four of the mounting holes and secure using machine screws. The tubes press fit snugly onto LEGO baseplates. We think this is great way to quickly prototype projects and experiment with custom LEGO builds.

## Download STLs

You'll need an STL file to 3D print the mount for the circuit playground express. Click the button below to download the STL from your choice of repo site.

Download STLs from Thingiverse


<https://adafru.it/BPF>

Download STLs from Pinshape

<https://adafru.it/BPG>

Download STLs from Youmagine

<https://adafru.it/BPH>

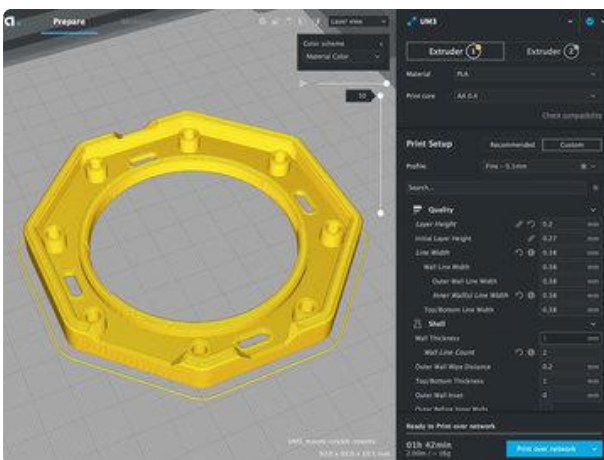


## Slicing In CURA

We've tested the model with CURA 3.x. The slice settings we used are configured for an Ultimaker 3. You can use our settings as reference.

- 0.4mm Nozzle
- 0.2 Layer Height
- 0.38 Line Width
- 2 Wall line count
- 70mm/s printing speed
- 20% infill



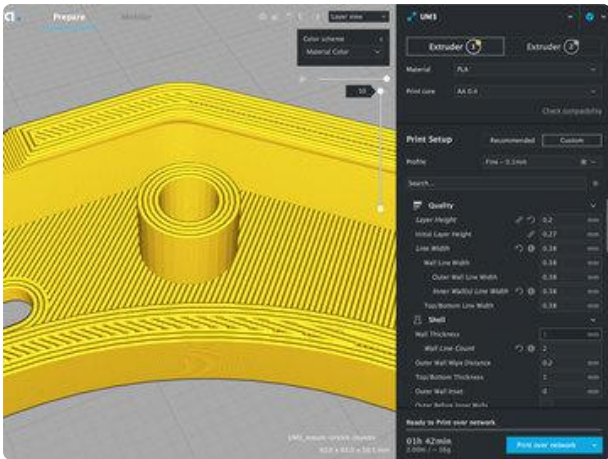

## Preview Tool Paths

In the CURA slicing software, you can use the "Layer View" to see how the tool paths will be generated. This allows you to inspect how the slice settings affect the features in the 3D model. In this example, note how the standoffs are rendered. The perimeters appear to be solid and consistent. The slice settings we used above will produce a clean tool path.



## Fusion 360 files


Below is a link to download the fusion 360 source file. This features the parametric timeline and sketches. You can modify the design or reuse the CPX and Crickit component for future projects.

Edit Mount Fusion 360 Design

<https://adafru.it/BPI>

Edit LEGO Mount Fusion 360 Design

<https://adafru.it/BT5>

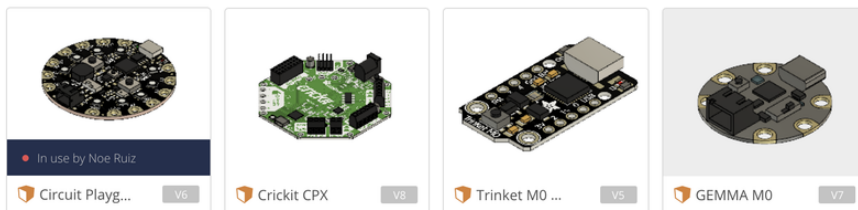

## Design Source Files

The enclosure assembly was designed in Fusion 360. This can be downloaded in different formats like STEP, SAT and more. Electronic components like the board,

displays, connectors and more can be downloaded from our [Fusion 360 CAD parts github repo \(https://adafru.it/AW8\)](https://adafru.it/AW8).

Adafruit CAD Parts Github

<https://adafru.it/AW8>