




Adafruit Gemma M0

Created by lady ada

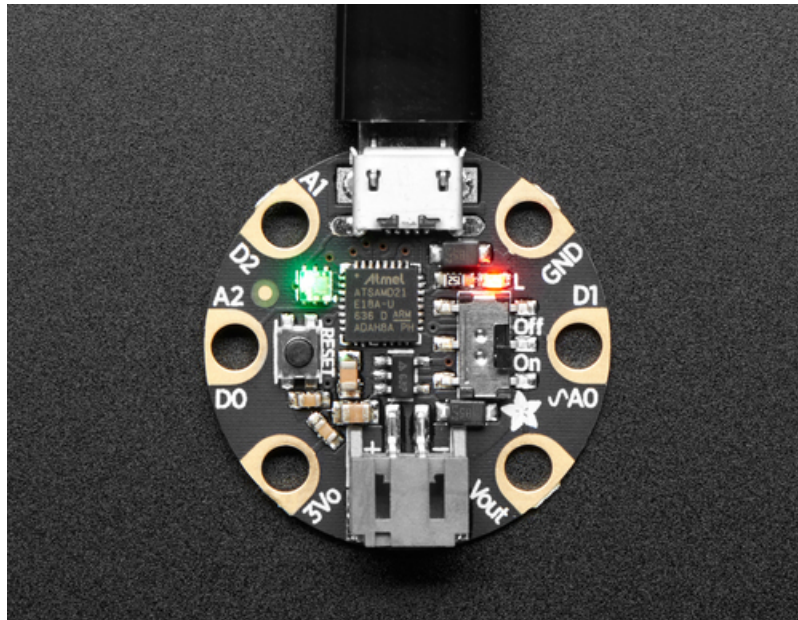

Last updated on 2021-01-23 07:36:38 PM EST

Guide Contents

Guide Contents	2
Overview	8
Guided Tour	11
Pinouts	13
JST Battery Input	13
Power Pads	13
Input/Output Pads	13
Common to all pads	13
Unique pad capabilities	14
The onboard Dotstar LED	14
Secret SWD and Reset Pads	14
Windows Driver Installation	16
Manual Driver Installation	18
What is CircuitPython?	19
CircuitPython is based on Python	19
Why would I use CircuitPython?	19
CircuitPython	21
Set up CircuitPython Quick Start!	21
Further Information	23
Gemma Default Zip Install	23
Installing Mu Editor	26
Download and Install Mu	26
Using Mu	26
Creating and Editing Code	28
Creating Code	28
Editing Code	30
Your code changes are run as soon as the file is done saving.	30
1. Use an editor that writes out the file completely when you save it.	31
2. Eject or Sync the Drive After Writing	31
Oh No I Did Something Wrong and Now The CIRCUITPY Drive Doesn't Show Up!!!	32
Back to Editing Code...	32
Exploring Your First CircuitPython Program	32
Imports & Libraries	32
Setting Up The LED	33
Loop-de-loops	33
What if I don't have the loop?	33
More Changes	34
Naming Your Program File	34
Connecting to the Serial Console	35
Are you using Mu?	35
Setting Permissions on Linux	36
Using Something Else?	36
Interacting with the Serial Console	37
The REPL	40
Returning to the serial console	43
CircuitPython Libraries	44
Installing the CircuitPython Library Bundle	45

Example Files	46
Copying Libraries to Your Board	46
Example: ImportError Due to Missing Library	46
Library Install on Non-Express Boards	48
Updating CircuitPython Libraries/Examples	48
Frequently Asked Questions	49
I have to continue using CircuitPython 3.x or 2.x, where can I find compatible libraries?	49
Is ESP8266 or ESP32 supported in CircuitPython? Why not?	49
How do I connect to the Internet with CircuitPython?	49
Is there asyncio support in CircuitPython?	49
My RGB NeoPixel/DotStar LED is blinking funny colors - what does it mean?	49
What is a MemoryError?	49
What do I do when I encounter a MemoryError?	50
Can the order of my import statements affect memory?	50
How can I create my own .mpy files?	50
How do I check how much memory I have free?	50
Does CircuitPython support interrupts?	50
Does Feather M0 support WINC1500?	50
Can AVR's such as ATmega328 or ATmega2560 run CircuitPython?	50
Commonly Used Acronyms	50
Uninstalling CircuitPython	52
Backup Your Code	52
Moving Circuit Playground Express to MakeCode	52
Moving to Arduino	53
Troubleshooting	55
Always Run the Latest Version of CircuitPython and Libraries	55
I have to continue using CircuitPython 3.x or 2.x, where can I find compatible libraries?	55
CPLAYBOOT, TRINKETBOOT, FEATHERBOOT, or GEMMABOOT Drive Not Present	55
You may have a different board.	55
MakeCode	55
Windows 10	55
Windows 7	56
MacOS	56
Windows Explorer Locks Up When Accessing boardnameBOOT Drive	57
Copying UF2 to boardnameBOOT Drive Hangs at 0% Copied	57
CIRCUITPY Drive Does Not Appear	57
Serial Console in Mu Not Displaying Anything	57
CircuitPython RGB Status Light	58
ValueError: Incompatible .mpy file.	59
CIRCUITPY Drive Issues	59
Easiest Way: Use storage.erase_filesystem()	59
Old Way: For the Circuit Playground Express, Feather M0 Express, and Metro M0 Express:	60
Old Way: For Non-Express Boards with a UF2 bootloader (Gemma M0, Trinket M0):	61
Old Way: For non-Express Boards without a UF2 bootloader (Feather M0 Basic Proto, Feather Adalogger, Arduino Zero):	61
Running Out of File Space on Non-Express Boards	61
Delete something!	61
Use tabs	62
MacOS loves to add extra files.	62
Prevent & Remove MacOS Hidden Files	62
Copy Files on MacOS Without Creating Hidden Files	63
Other MacOS Space-Saving Tips	63

Device locked up or boot looping	64
Welcome to the Community!	66
Adafruit Discord	66
Adafruit Forums	67
Adafruit Github	68
ReadTheDocs	69
CircuitPython Essentials	70
CircuitPython Built-Ins	71
Thing That Are Built In and Work	71
Flow Control	71
Math	71
Tuples, Lists, Arrays, and Dictionaries	71
Classes, Objects and Functions	71
Lambdas	71
Random Numbers	71
CircuitPython Digital In & Out	72
Find the pins!	73
Read the Docs	75
CircuitPython Analog In	76
Creating the analog input	76
get_voltage Helper	76
Main Loop	76
Changing It Up	77
Wire it up	77
Reading Analog Pin Values	80
CircuitPython Analog Out	81
Creating an analog output	81
Setting the analog output	81
Main Loop	81
Find the pin	82
CircuitPython PWM	86
PWM with Fixed Frequency	86
Create a PWM Output	87
Main Loop	87
PWM Output with Variable Frequency	87
Wire it up	88
Where's My PWM?	93
CircuitPython Servo	94
Servo Wiring	94
Standard Servo Code	96
Continuous Servo Code	96
CircuitPython Cap Touch	98
Create the Touch Input	98
Main Loop	98
Find the Pin(s)	99
CircuitPython Internal RGB LED	103
Create the LED	103
Brightness	104
Main Loop	104
Making Rainbows (Because Who Doesn't Love 'Em!)	105
Circuit Playground Express Rainbow	106
CircuitPython NeoPixel	108
Wiring It Up	108

The Code	109
Create the LED	110
NeoPixel Helpers	111
Main Loop	111
NeoPixel RGBW	111
Read the Docs	112
CircuitPython DotStar	114
Wire It Up	114
The Code	115
Create the LED	117
DotStar Helpers	118
Main Loop	118
Is it SPI?	118
Read the Docs	119
CircuitPython UART Serial	120
The Code	120
Wire It Up	121
Where's my UART?	124
Trinket M0: Create UART before I2C	125
CircuitPython I2C	127
Wire It Up	127
Find Your Sensor	130
I2C Sensor Data	131
Where's my I2C?	132
CircuitPython HID Keyboard and Mouse	134
CircuitPython Keyboard Emulator	134
Create the Objects and Variables	135
The Main Loop	136
CircuitPython Mouse Emulator	136
Create the Objects and Variables	138
CircuitPython HID Mouse Helpers	138
Main Loop	138
DHT CircuitPython Code	140
Adafruit CircuitPython Module Install	140
Wiring	140
Usage	141
Example Code	142
CircuitPython CPU Temp	144
CircuitPython Storage	145
Logging the Temperature	146
CircuitPython Expectations	149
Always Run the Latest Version of CircuitPython and Libraries	149
I have to continue using CircuitPython 3.x or 2.x, where can I find compatible libraries?	149
Switching Between CircuitPython and Arduino	149
The Difference Between Express And Non-Express Boards	149
Non-Express Boards: Gemma, Trinket, and QT Py	150
Small Disk Space	150
No Audio or NVM	150
Differences Between CircuitPython and MicroPython	150
Differences Between CircuitPython and Python	150
Python Libraries	150

Integers in CircuitPython	150
Floating Point Numbers and Digits of Precision for Floats in CircuitPython	151
Differences between MicroPython and Python	151
MakeCode	152
What is MakeCode Maker?	153
How is it related to makecode.adafruit.com ?	153
Is it open source?	153
Editing Blocks	156
Blinky!	156
Editing JavaScript	158
Blocks to JavaScript	158
Downloading and Flashing	159
Step 1: Connect your board via USB	159
Step 2: Test your code in the simulator	159
Step 3: Download and flash your code	160
General Steps to copy over your program (not specific to any Operating system)	160
Saving and Sharing	161
Extracting your code from the board	161
Sharing	161
Custom Extensions	162
Account setup	162
Commit and push	163
Conflicts	164
Testing your package	164
Arduino IDE Setup	166
https://adafruit.github.io/arduino-board-index/package_adafruit_index.json	167
Using with Arduino IDE	169
Install SAMD Support	169
Install Adafruit SAMD	169
Install Drivers (Windows 7 & 8 Only)	171
Blink	172
Successful Upload	173
Compilation Issues	173
Manually bootloading	174
Ubuntu & Linux Issue Fix	174
Adapting Sketches to M0 & M4	175
Analog References	175
Pin Outputs & Pullups	175
Serial vs SerialUSB	175
AnalogWrite / PWM on Feather/Metro M0	176
analogWrite() PWM range	177
analogWrite() DAC on A0	177
Missing header files	177
Bootloader Launching	177
Aligned Memory Access	177
Floating Point Conversion	178
How Much RAM Available?	178
Storing data in FLASH	178
Pretty-Printing out registers	178

M4 Performance Options	179
CPU Speed (overclocking)	179
Optimize	179
Cache	180
Max SPI and Max QSPI	180
Enabling the Buck Converter on some M4 Boards	180
Downloads	181
Files:	181
Schematic & Fabrication Print	181
UF2 Bootloader Details	183
Entering Bootloader Mode	184
Using the Mass Storage Bootloader	186
Using the BOSSA Bootloader	187
Windows 7 Drivers	187
Verifying Serial Port in Device Manager	187
Running bossac on the command line	189
Using bossac Versions 1.7.0, 1.8	189
Using bossac Versions 1.9 or Later	189
Updating the bootloader	190
Getting Rid of Windows Pop-ups	191
Making your own UF2	192
Installing the bootloader on a fresh/bricked board	192

